



IS7101A ADDITIONAL HANDSET REGISTRATION INSTRUCTIONS

This additional handset has been designed to operate with the IS7121A/IS7121-2A telephone system. Please refer to your IS7121A/IS7121-2A user's manual for instructions on general functionality.


Package Contents

- IS7101A handset
- Handset charger and power adapter
- NiMH rechargeable battery pack

Setting up Your IS7101A Additional Handset

The position in which you place the IS7101A charger could have an effect on the range and performance of your IS7101A.


1. Plug the mains power cable into the charger base, plug the other end into the mains power wall socket and switch the power on.

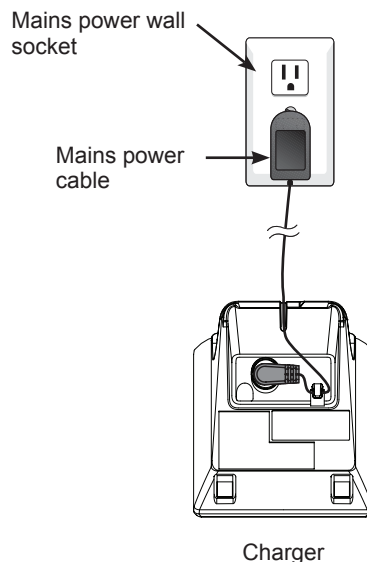

NOTE

Ensure the power cord is fed through the slot on the charger so the unit sits flush with the desk.

2. Slide open the battery compartment cover.
3. Place the supplied rechargeable battery in the battery compartment, with the battery connector plugged in, as shown.
4. Slide the battery compartment cover back on until it clicks into place.
5. Place the handset on the base to charge for at least 16 hours. The Charging LED lighting up indicates that the handset is properly placed on the base.

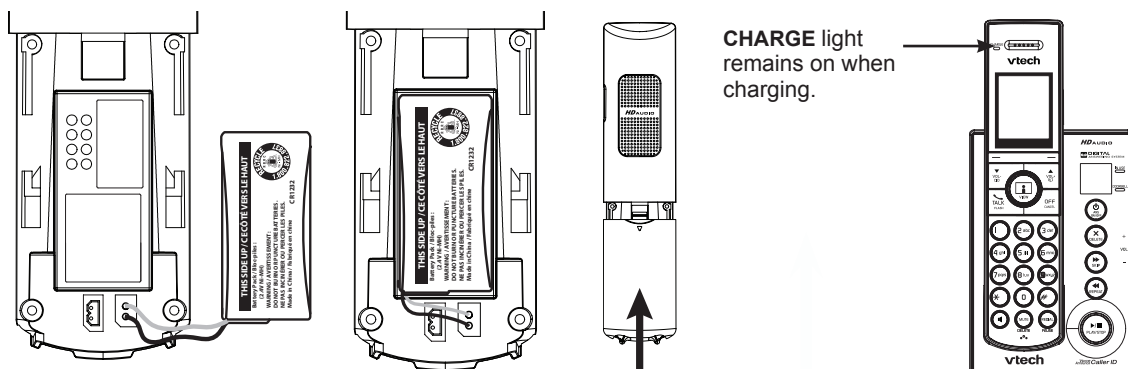

Registering an Additional Handset

The IS7101A additional handset must be registered to the telephone base before use. To register the additional handset to your IS7121A/IS7121-2A, follow the instructions below.

Easy registration for additional handset

1. Make sure the handset is out of the telephone base or charger and shows **Put handset on BASE to register**. Place the handset you wish to register in the telephone base.
2. The handset displays **Registering handset...** then **HANDSET X Registered** and you hear a confirmation tone when the registration is successful. It takes about 60 seconds to complete the registration process.

If the registration fails, the handset displays **Registration failed**. Try the registration process again.

NOTES

- You cannot register a handset if any other system handset is in use.
- If you have not set the date and time for the telephone system, the handset will prompt you to set the date and time after it is registered to the base. To skip setting, press **CANCEL**.

If you have any problems with your phone, refer to the TROUBLESHOOTING section of your IS7121A/IS7121-2A User's manual.

For technical support, please call VTech Technical Inquiry Hotline 852-2667 7433.

© 2014 VTech Telecommunications Ltd. All Rights Reserved.